



Integrated circuits (IC)



The development

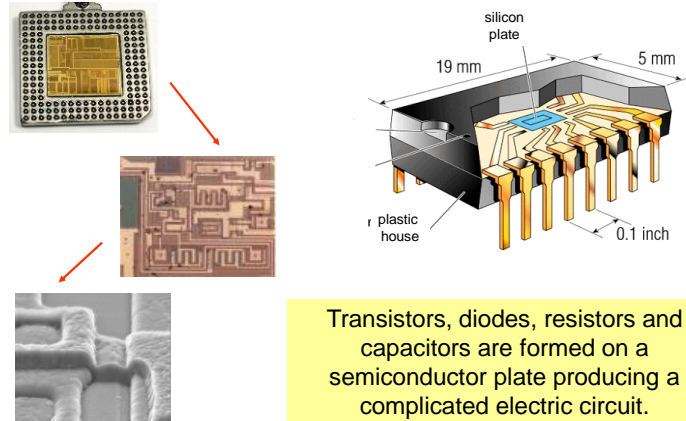


Microprocessor Transistor Counts 1971-2011 & Moore's Law

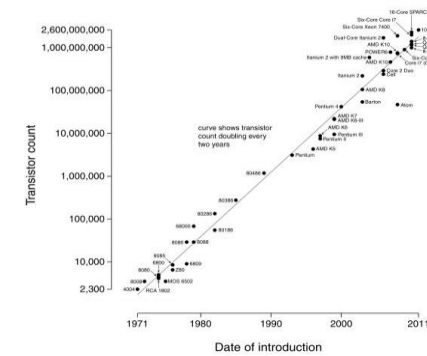


There are about 10^{11} neurons in the brain.


Detectors

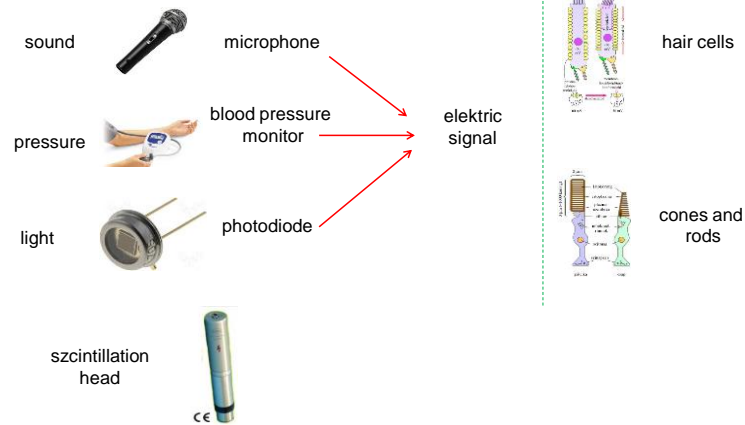

Biological signals

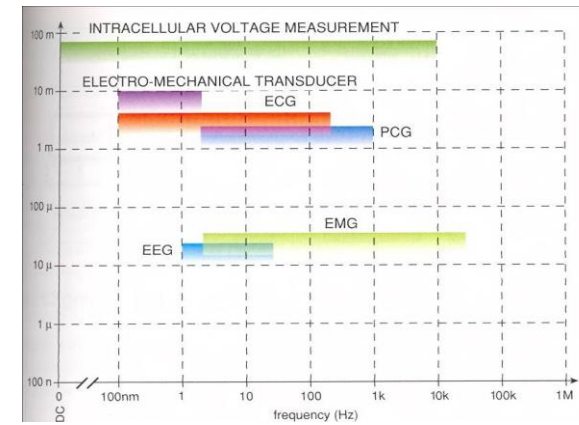

Amplifier

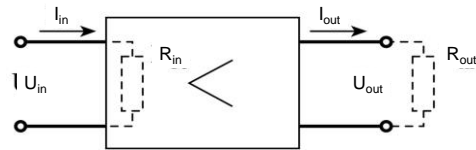

Amplifier if
 $P_{out} > P_{in}$

Power gain: (A_P)

Voltage gain: (A_U)

$$A_P = \frac{P_{out}}{P_{in}}$$

$$A_U = \frac{U_{out}}{U_{in}}$$

The decibel scale

Instead of the simple proportion we use frequently the logarithmic of them. This is the decibel-scale.

$$n = 10 \cdot \lg \frac{P_{out}}{P_{in}} \text{ (dB)}$$

$$P = \frac{U^2}{R}$$

$$A_P = \frac{U_{out}^2 / R_{out}}{U_{in}^2 / R_{in}} = \frac{U_{out}^2}{U_{in}^2} \cdot \frac{R_{in}}{R_{out}} = A_U^2 \cdot \frac{R_{in}}{R_{out}}$$


$$n(\text{dB}) = 10 \cdot \lg A_U^2 + 10 \cdot \lg \frac{R_{in}}{R_{out}} = 20 \cdot \lg A_U \left(+ 10 \cdot \lg \frac{R_{in}}{R_{out}} \right)$$



Fourier theoreme

$$y(t) = \sum_k a_k \sin(k \cdot \omega_0 \cdot t + \Phi_k)$$

Every periodic signal may be decomposed into the sum of sinusoidal signals.

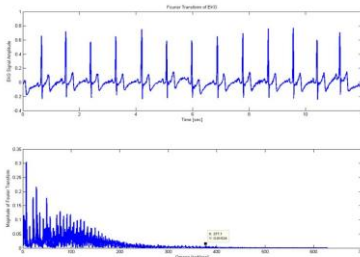


An ecg signal and it's frequency components.


Transfer characteristics

The amplification (in decibel) as the function of the frequency.

In the presence of the noise the real amplifier is better.

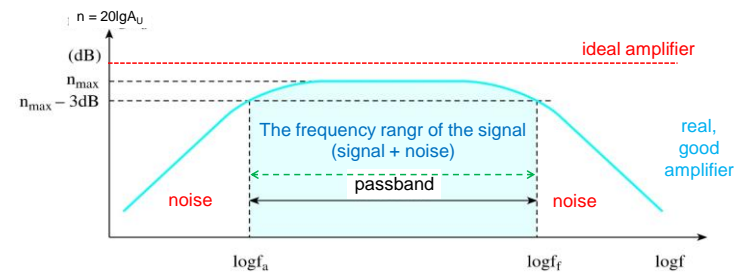


Feed-back

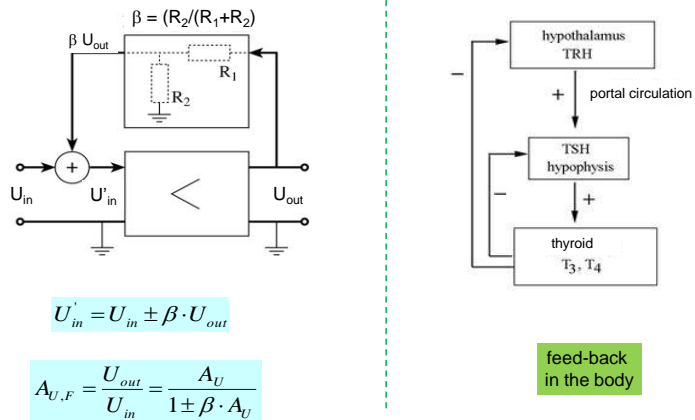

Negative feed-back

The feed-backed part of the output is added to the input after inversion.

$$A_{U,NF} = \frac{U_{out}}{U_{in}} = \frac{A_U}{1 + \beta \cdot K_U}$$

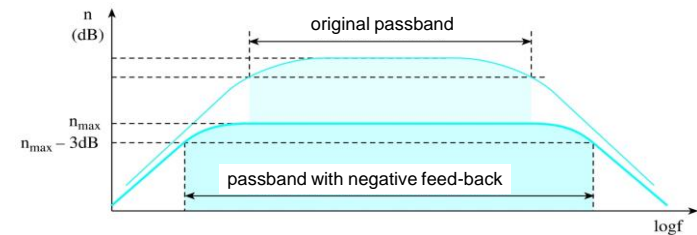

Advantage of the negative feed-back

$$A_{U,F} = \frac{U_{out}}{U_{in}} = \frac{K_U}{1 + \beta \cdot K_U} \text{ usually } \beta \cdot K_U \gg 1, \text{ so } K_{U,F} \approx \frac{K_U}{\beta \cdot K_U} = \frac{1}{\beta}$$

The properties (gain, transfer band) depend on feed-back elements only.

Consequences:

1. The parameters (gain, transfer band) are well defined.
2. Noise level decreases on the output.
3. Stability increases.

Pozitive feed-back

The feed-backed part of the output is added to the input.

$$A_{U,PF} = \frac{U_{out}}{U_{in}} = \frac{A_U}{1 - \beta \cdot A_U}$$


if $\beta A_U = 1$ the system is unstable, oscillation.




Oscillators: used to produce electric signal.

Digitizing the signal

Digital signal: a signal characterized by digital value and determined at a given time periodically (sampling).

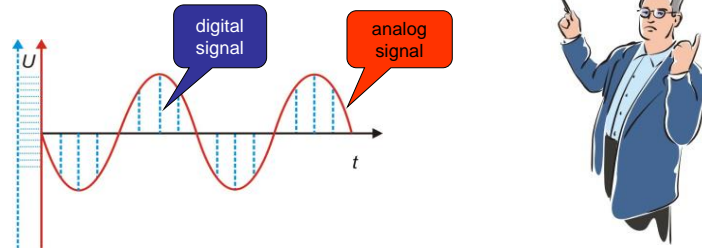


Binary system of the numbers

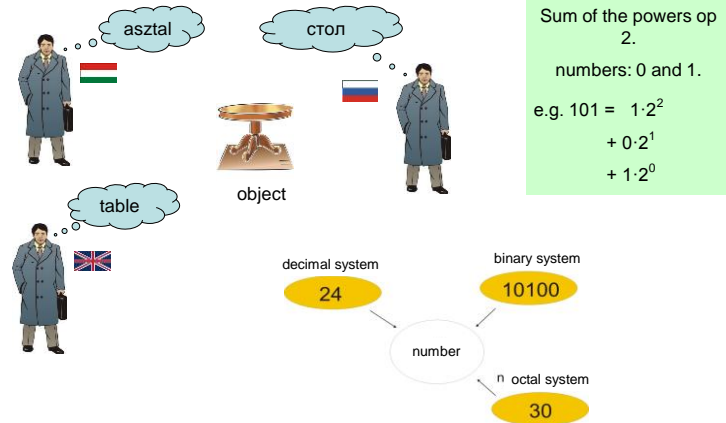

Shannon principle


$$f_{\text{sampling}} \geq 2 \cdot f_{\text{signal}}$$

If the sampling doesn't fulfill this requirement, false frequencies appear.

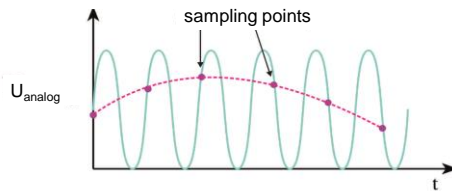


Role of the resolution

quantization noise:
noise due to the quantization.

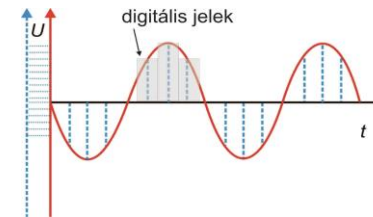


Due to the quantization series of square pulses appear. The frequency range of them is different from the original one. Higher resolution decreases this noise.

Role of the noise level

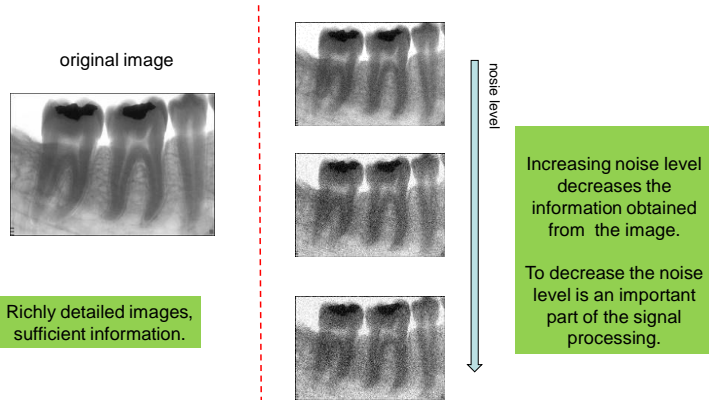

Planning a good amplifier

Base: Noise is present in the whole frequency range.

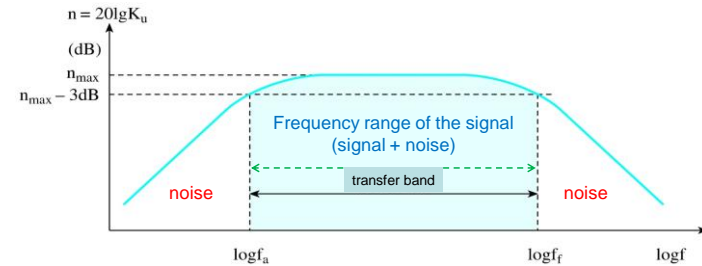


The signal to noise ratio increases due to the decreasing amplification out of the transfer band.

Multistage amplifier

Base: the amplifier is also a source of the noise!


Example: ecg amplifier. Signal level about is a few mV, required signal level about is a few V.
 A_u is 1000. If there is no noise mixed to the signal, the noise on the input derives from the amplifier.

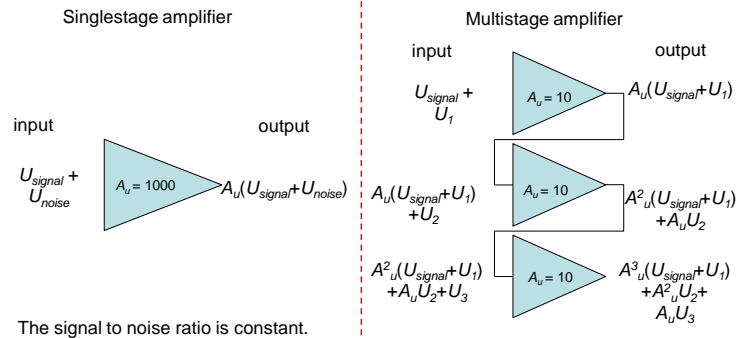

Decreasing the noise by averaging

Base:


Noise is random while the signal is not.

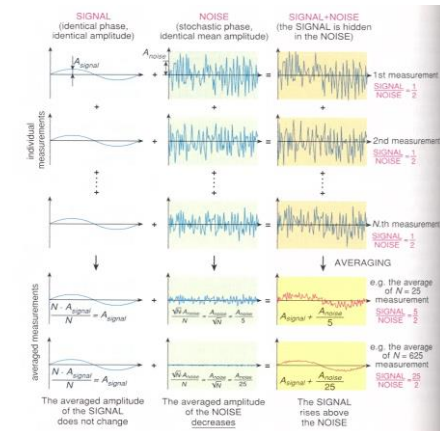

Pulse signals


Base: The amplitude of the noise pulses is different in average.

Integral discriminator (ID)



Signal is produced only over a certain level.

Differential discriminator (DD)



Signal is produced if the amplitude is in the channel.

Displays

CRT (not frequently used nowadays)




LCD

OLED



XEL-1

Displaying a time process



Time is on the horizontal axis and amplitude of the signal is on the vertical axis.

Information in an image

What is on the photo?


„A landscape, a beautiful garden.”




In fact:

How much is the absorption ability and the reflectivity of the different objects.

Structure of an image

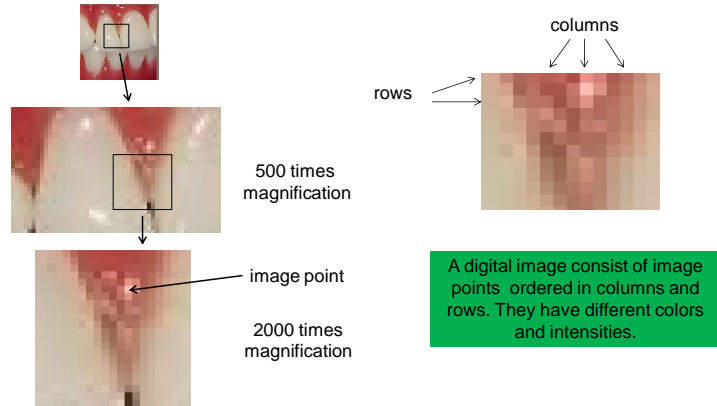

Physical content of an image




Every image point corresponds to a small part of the body. This part normally is a square. This is a **pixel**. The pixel is considered to be homogeneous. The properties of an image point are related to some physical characteristics of the pixel.

The 1. and the 2. pixel have the same absorption ability, but the reflectivity is different.


The absorption ability of the 3. pixel is different, too.

X-ray image



What information is in this image?
The x-ray absorption ability of the pixel is recorded in the image point.
Practically the μ value.

Gray scales of a CT image at different „windows“.



3D image




Every image point corresponds to a certain volume of the body. This volume normally a cube. this is the **voxel**.


The properties of an image point are related to some physical characteristics of the voxel.

LCD (Liquid Crystal Display)

Structure and working of a single pixel (cell)

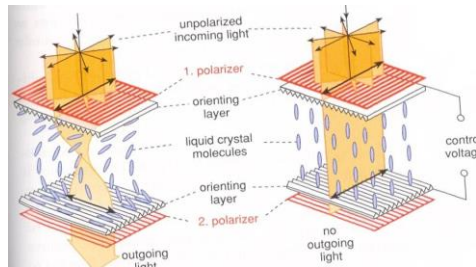


TFT (-LCD) display



A very thin (transparent) transistor layer switches each pixel. This improves the speed.

OLED Structure

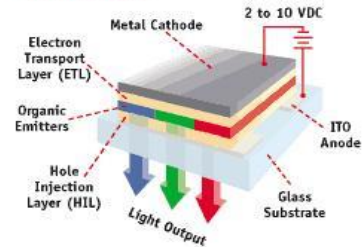

LED: Light Emitting Diode

O_(rganic)LED displays

This is the structure of a unit cell (an image point) of the display. The recombination of the electrons and holes produces the light. The color corresponds to the energy difference of them.
(Of course one of the electrodes must be transparent.)


Comparison of displays

	CRT	LCD	TFT-LCD (LED)	Plasm	OLED
brightness (cd/m ²)	~100	200-300	200-300	400-1000	A few 100
Contrast ratio	> 1000:1	~ 600:1	600:1 (but LED: 1000000:1)	> 1000:1	> 1000:1
Viewing angle	whole range	~140-160 degree	~140-160 degree	~160 degree	whole range
Frame rate	<1 ms	8-20 ms	<8 ms	<1 ms	<1 ms


Flexible displays




Transparent displays



Application of the CCD

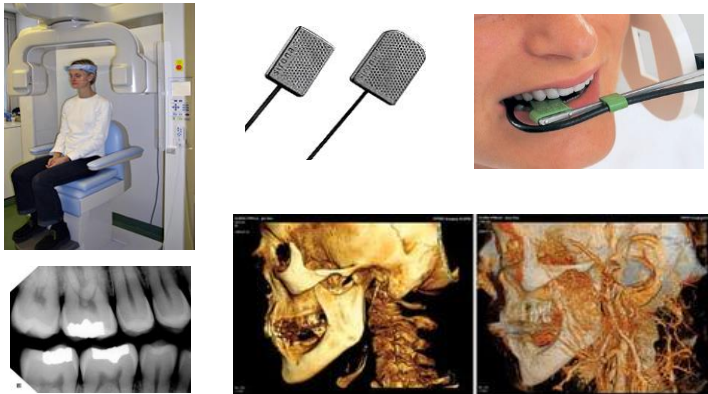

Unit cell of a CCD

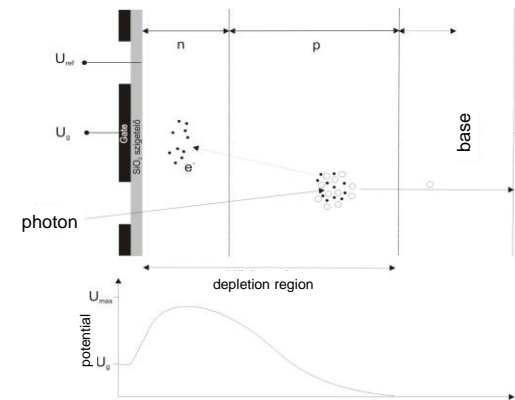

Charge transport

